




# CITEL



## M50-230S-B

- Hybrid MOV-GSG Technology
- UL1449 Type 1 LISTED
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator and audible alarm
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

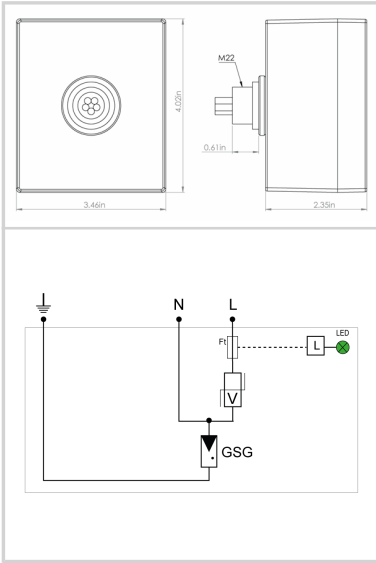

Características eléctricas		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
TENSION	(V)	230
AC/DC/DC PV/RF		AC
FASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+80
MODOS		L-L, L-G, L-N, N-G
VPR	(V)	1200/1500/1200
MCOV	(V)	280/280/140
IN	(kA)	20
Icc	(kA)	150
<i>cortocircuito</i>		
IMAX	(kA)	50
Características mecánicas		
TECNOLOGIA		MOV-GSG
CONFIGURACION DE RED		3PH, 4W+G, Wye
FORMA DE CONEXION		36° #12 AWG LEADS
MONTAJE		BACK MOUNT, THREADED M22 (1/2" NPT ADAPTER)
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6 (IP66)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		LED and audible alarm
DIMENSIONS		See diagram
WEIGHT		2.5 lbs.
Normas		
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Código		
<b>751313</b>		

