




CITEL



UL TYPE 1 SPD - I_{max} 50kA - I_n 20kA - AC Panel Mount

M50-240T-B

- ▶ Hybrid MOV-GSG Technology
- ▶ UL1449 Type 1 LISTED
- ▶ 50kA Surge Current Rating per mode
- ▶ Extended life with no leakage current
- ▶ Visual LED fault indicator and audible alarm
- ▶ NEMA 6 (exceeds NEMA 4X or 4)
- ▶ 10-Year warranty

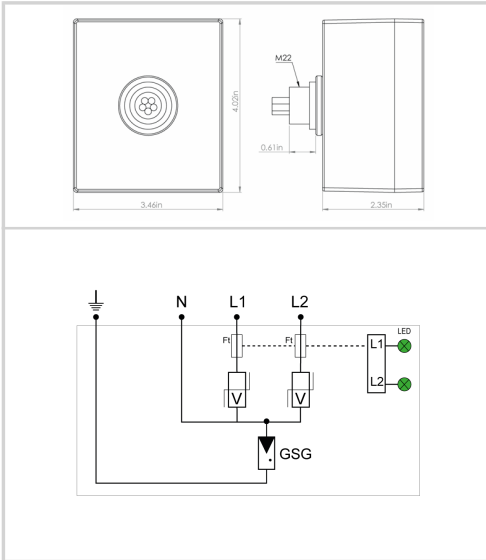

Características eléctricas		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
TENSION	(V)	480/240
AC/DC/DC PV/RF		AC
FASE	(PH)	1S
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+80
MODOS		L-L, L-N, L-G, N-G
VPR	(V)	2500/1200/1500/1200
MCOV	(V)	480/280//280/240
IN	(kA)	20
I _{cc} cortocircuito	(kA)	150
IMAX	(kA)	50
Características mecánicas		
TECNOLOGIA		MOV-GSG
CONFIGURACION DE RED		1PH, 2W+G, Split Phase
FORMA DE CONEXION		36" #12 AWG LEADS
MONTAJE		BACK MOUNT, THREADED M22 (1/2" NPT ADAPTER)
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6 (IP66)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		LED and audible alarm
DIMENSIONS		See diagram
WEIGHT		2.5 lbs.
Normas		
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Código		
751412		

