

UL TYPE 1 SPD - Imax 40kA - In 20kA - Module

DS41S-400



- UL1449 TYPE 1 LISTED SPD
- MOV Technology
- 40kA Surge Current Rating
- Visual fault indicator and remote contacts
- 10-Year warranty

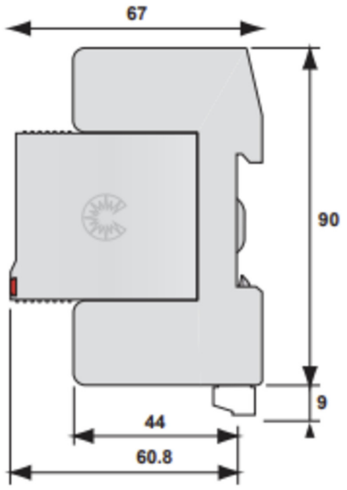



V: High-energy varistor
Ft: Thermal fuse
C: Remote signal contact
t°: Thermal disconnection system
MI: Disconnection indicator

Electrical Characteristics		
Network		230/400V
Nominal line voltage	Un	400 Vac
Max. AC operating voltage	Uc	440 Vac
Connection mode(s)		L/N or N/PE
Residual voltage at 5 kA *@ 5 kA (8/20µs)*	Up-5kA	1.3 kV
POWER SPD TYPE		UL1449 TYPE 1 LISTED
VOLTS	(V)	277
AC/DC/DC PV/RF		AC
PHASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODES		L-G
VPR	(V)	-/-/1500/-
MCOV	(V)	-/-/420/-
IN *15 impulses 8/20µs*	(kA)	20
SCCR	(kA)	100
IMAX *8/20µs*	(kA)	40
limp *10/350µs*	(kA)	4
Mechanical Characteristics		
Format		Plug-in modular box
Failsafe mode		Disconnection from AC network
TECHNOLOGY		MOV
NETWORK CONFIGURATION		2 wires
CONNECTION METHOD		SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MOUNTING		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
HUMIDITY		32°C + RH88%
VIBRATION		ASTM D4169, DC 3 Level II
FAIL-SAFE BEHAVIOR		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		DMS40-400
Standards		
Certification		CSA / UL Listed
Environmental standards		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7

DS41S-400

UL FILE NUMBER		E326289
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number		
3314111		