





UL497E LISTED - I_{max} 20kA (10kA UL) - In 10kA

CITEL

P8AX09-N/MF



►4GHz Bi-Directional Coaxial Surge Protector - High Energy GDT Technology - Low Insertion Loss - Field Replaceable GDT - Waterproof Design - DC Pass - UL497E Listed

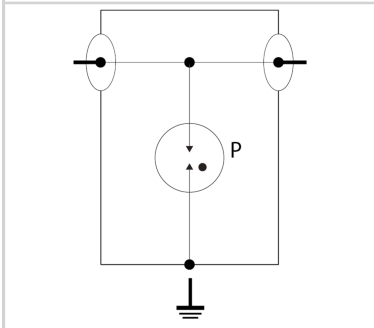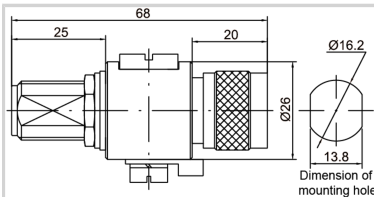

Electrical Characteristics		
Max. DC operating voltage	Uc	72 Vdc
Frequency range	f	DC-3.5 GHz
Insertion loss		< 0.2 dB
Return loss		> 20 dB
Impedance		50 ohms
VSWR		<1.2:1
Max. load current @25°C	IL	10 A
Nominal discharge current <i>C2 Category</i>	In	5 kA
Protection mode(s)		Common mode
Impulse current <i>2 x 10/350µs Test - D1 Category</i>	Iimp	1 kA
Max Power		25 W
DC Pass		Yes
Insulation resistance	IR	≥10 GOhms
RF Power <i>Maximum</i>	W	25.0000
Return Loss <i>Minimum</i>	db	20
VSWR <i>Maximum</i>	:1	<1.25
Max Total Discharge Current <i>I_{max} (8/20µs x 1)</i>	kA	10.0000
Max Discharge Current <i>I_{max} (8/20µs x 1)</i>	kA	10.0000
RF SPD TYPE		UL497E LISTED
VOLTS	(V)	48
AC/DC/DC PV/RF		RF
WIRES		1W+GROUND
LINE CURRENT MAX	(A)	10
POWER RATING	(W)	25
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	700
IMAX <i>8/20µs</i>	(kA)	20
FREQUENCY RANGE	(GHz)	0-4.0
INSERTION LOSS (@ FREQ)	(db)	<0.2
RETURN LOSS	(db)	22
VSWR		<1.25:1
IMPEDANCE	Ω	50
Installation		
Operating TemperatureMin	°C	-45.0000
Operating TemperatureMax	°C	85.0000



UL497E LISTED - I_{max} 20kA (10kA UL) - In 10kA

CITEL

P8AX09-N/MF

Operating Temperature _{Min}	*F	-50.0000
Operating Temperature _{Max}	*F	85.0000
Operating Relative Humidity _{Max}	%RH	Can be submerged
Operating Altitude _{Min}	Ft	2000.0000
Operating Altitude _{Max}	Ft	6500.0000
Housing/Enclosure material		Cu, Zn, Sn plated Brass
Mounting		Bracket or through hole
IP Environmental rating _{IP}		IP65
NEMA Environmental rating _{NEMA}		NEMA 4
Installation Location		Indoor / outdoor
Spare part		BB HF 90/20
Accessories		BK
Product Dimension _L	mm	68.0000
Product Dimension _H	mm	26.0000
Product Dimension _W	mm	13.8000
Product Dimension _L	In	2.6800
Product Dimension _H	In	1.0200
Product Dimension _W	In	0.5400
Miscellaneous		
Individual Pack		No
Storage Temperature _{Min}	*C	-40.0000
Storage Temperature _{Max}	*C	85.0000
Storage Temperature _{Min}	*F	-40.0000
Storage Temperature _{Max}	*F	85.0000
Mechanical Characteristics		
Technology		Gas discharge tube
Connection to Network		Connector N Male/Female
Failsafe mode		Short-circuit
Contacts		Bronze/Surface Au-Ag
Insulation material		PTFE
TECHNOLOGY		GDT
CONNECTION METHOD		SERIES CONNECTOR, BI-DIRECTIONAL
CONNECTOR TYPE		N
GENDER		MALE TO FEMALE
MOUNTING		BULKHEAD, OPTIONAL BRACKET
MATERIAL		Cu, Zn, Sn plated Brass, PTFE
NEMA RATING (IP RATING)		NEMA 6P (IP67)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		BA HF 90/20
Standards		
RohS compliance		Yes
UL STANDARD		UL497E
UL CATEGORY		QVLA
UL FILE NUMBER		E349646
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
60001		

