





CITEL




MJ8-C6A

- ▶ Cat.6a Ethernet Surge Protector
- ▶ Hybrid GDT and Diode Technology
- ▶ 10/100/1000Mbps Compatible
- ▶ Bi-Directional Protection
- ▶ 16kA Total Surge Current Rating
- ▶ DIN Rail, Screw Lug, and Flange Mounting
- ▶ UL497B Listed

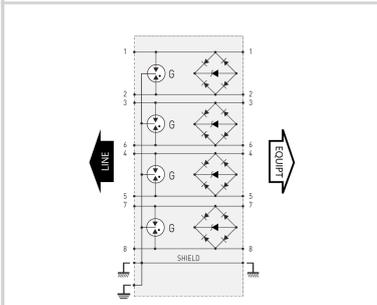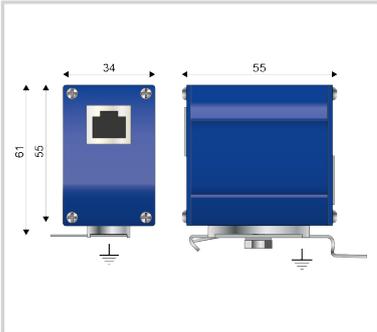

G: 3-electrode GDT

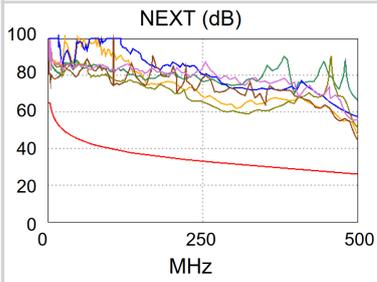

Electrical Characteristics		
Network		10Gigabit Ethernet - Cat 6A cabling specification
Protection modes (network)		CM / DM
Protection modes (POE)		CM / DM (common mode / differential mode)
Transmission standard		IEEE 802.3an
Lightning Protection Zones (LPZ)		0 - 3
Max. operating voltage (DATA)	Uc	8 Vdc
Max. frequency, in the channel	f max.	500 MHz
Max. data rate		10 Gbps
Max. load current @25°C	IL	2 A
Nominal discharge current C2 (1.2/50 μ s / 8/20 μ s), 10 applications X-C (Line/Earth)	In	4 kV / 2 kA
Max. discharge current max. withstand @ 8/20 μ s, X-C (Line/Earth)	Imax	2 kA
Max. discharge current max. withstand @ 8/20 μ s, 8X-C (1&2&3&6+4&8; 5+7&8 to Earth)	Imax Total	16 kA
Protection Level C3 (10/1000 μ s), 300 applications@10 A, Y-Y (Line/Line)	Up	< 20 V
Protection Level C3 (10/1000 μ s), 300 applications@10 A, Y-C (Line/Earth)	Up	< 500 V
Impulse current D1 (10/350 μ s), 2 applications, X-C (Line/Earth)	Iimp	400 A
Line resistance (\pm 10%)		~ 0 ohms
Capacitance @1MHz, X-C (Line/Earth)	C	< 5 pF
Mechanical Characteristics		
Technology		GDT+TVS diode
Connection to Network		RJ45 shielded connectors Female input/output
Format		Metallic Enclosure with connectors input/output
Mounting		DIN rail / Wall / Plate
Accessory(s) provided		Screw, washer, cable shoe, earthing plate, DIN rail adapter
Operating temperature	Tu	-40/+85°C
Ingress Protection rating		IP20 (NEMA 2)
Failsafe mode		Transmission cut-off - Fault mode 2 (short-circuit)
Pinout		(1-2)(3-6)(4-5)(7-8)
NETWORK CONFIGURATION		Single C6A Line
PIN OUT		[1-2][3-6][4-5][7-8]
DIMENSIONS		See diagram
Standards		
UL File Number		E184939
Certification		UL listed
Environmental standards		EU RoHS
UL STANDARD		UL497B
UL CATEGORY		QVGG
UL FILE NUMBER		E184939
STANDARDS		IEC 61643-21, NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number		
581540		

