




# CITEL

## LSCM-D/230AC/P1000



- ▶ Lightning and Surge Current Counter & SPD monitoring device
- ▶ Wide surge current detection range:
  - ▶ 0.3/25 kA or 1/50 kA @10/350µs
  - ▶ 0.3/50 kA or 1/100 kA @ 8/20 µs
- ▶ Front display for access to recorded events and device parameters
- ▶ Peak current and time stamping recording of the surge currents
- ▶ RS485 communication interface / MODBUS protocol
- ▶ Monitoring features: 2 inputs (SPD or disconnecter status) / 1 output
- ▶ IEC 62561-6 compliance

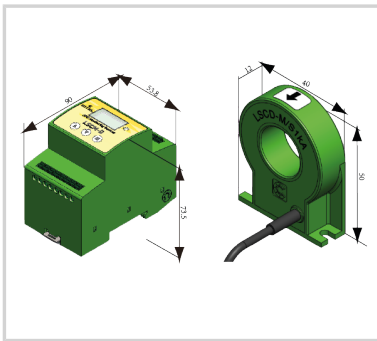

Electrical Characteristics		
Max. AC operating voltage	Uc	230 Vac
Connection mode(s)		2 connection PE ports
Minimum current sensibility	I <sub>tc</sub>	1000A
Max. admissible impulse current	I <sub>mcw</sub>	100 kA (8/20µs) / 50 kA (10/350 µs)
Mechanical Characteristics		
Wiring		Connection wire sensor : Coaxial-cable AWG26
Mounting		Symmetrical rail 35 mm (EN 60715)
Operating and storage temperature		-20/+60°C / -25 /+70°C
Display		128*64 lattice OLED display, green/red status LED display
CONNECTION METHOD		<ul style="list-style-type: none"> <li>Counter: Spring-cage terminals - Sensor : Plug-in (1 sensor line port)</li> </ul>
MOUNTING		Din Rail-Symmetrical 35mm (EN60715)
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 1 (IP20)
REAL-TIME DIAGNOSTICS		Two channel to input switching signal and one channel of output switching signal
DIMENSIONS		See diagram (mm)
Standards		
STANDARDS		EN 62561.6
Part number		
<b>793534</b>		

