




# CITEL

## UL TYPE 4CA - I<sub>max</sub> 22kA - I<sub>n</sub> 10kA

### MLPC1-277L-V-Ex



- UL121201 Hazardous Locations
- UL1449 5th ed. Type 2 SPD
- ANSI C136.2
- 120 VAC to 277 VAC
- Plate Mounting
- Screw Terminal Connection
- Series or Parallel Installation
- Status indicator
- Disconnection AC end of life
- Total Surge Rating – I<sub>total</sub>: 20kA

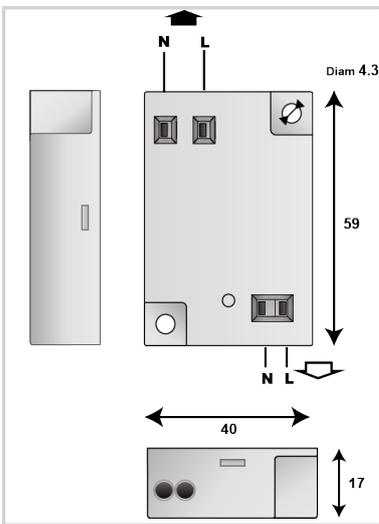

#### Electrical Characteristics

Nominal line voltage	Un	100 V-277 V
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	I <sub>max</sub>	10 kA
POWER SPD TYPE		UL1449 TYPE 2 LISTED
VOLTS	(V)	277
AC/DC/DC PV/RF		AC
PHASE	(PH)	1
AMPS	(A)	5
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODES		L-L, L-G, L-N, N-G
VPR	(V)	1500/1500/1200
MCOV	(V)	385/385/255
IN <i>15 impulses 8/20 μs</i>	(kA)	5
SCCR	(kA)	18
IMAX <i>8/20 μs</i>	(kA)	10

#### Mechanical Characteristics

TECHNOLOGY		MOV-GSG
NETWORK CONFIGURATION		2 pole, 2W+G, Single/Spilt Phase
CONNECTION METHOD		Screw Terminal (4-10AWG)
MOUNTING		FLANGE MOUNT
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		LED Indicator
DIMENSIONS		See diagram
WEIGHT		0.30 lbs

#### Standards

Certification		UL 497B
UL STANDARD		UL1449 5th Edition & UL121201
UL CATEGORY		VZCA, VZCA7, VZCH, VZCH7
UL FILE NUMBER		E326289, E527348
UL121201 HAZARDOUS LOCATION		Class I, Division 2, Groups A, B, C & D: Operating Temp. T4A
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ANSI/IEEE C62.41		Category C 20kV/10kA
ANSI/IEEE C136.2		Enhanced Category 10kV/5kA
ENVIRONMENTAL STANDARDS		ROHS

#### Part number

**897017**

