




CITEL

UL TYPE 1 SPD - I_{max} 80kA - I_n 20kA -Modular DIN RAIL

DAC83US-120Y/NN



- ›UL1449 5th edition
- ›Type 1 SPD
- ›I_{max}-80kA
- ›I_n-20kA
- ›Visual fault indicator and remote contacts
- ›Pluggable/Replaceable Modules
- ›QR Code Linked Installation Sheet
- ›10-Year warranty

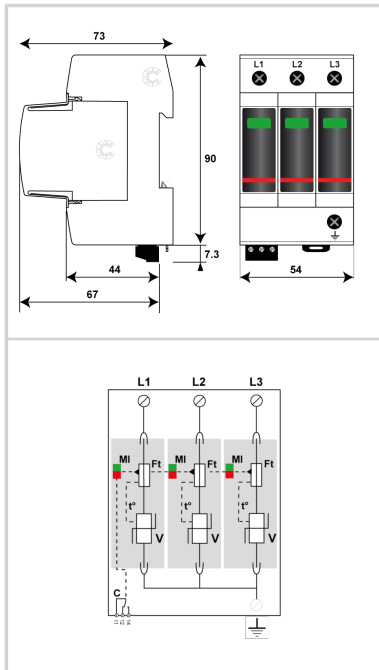

Características eléctricas

POWER SPD TYPE		UL1449 TYPE 1 LISTED
TENSION	(V)	208/120
AC/DC/DC PV/RF		AC
FASE	(PH)	3Y
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODOS		L-L, L-G
VPR	(V)	1200/-/700/-
MCOV	(V)	300/-/150/-
IN	(kA)	20
I _{cc} cortocircuito	(kA)	200
IMAX	(kA)	80
RELATIVE HUMIDITY	(%)	95%

Características mecánicas

TECNOLOGIA		Multi-MOV
CONFIGURACION DE RED		3PH, 3W+G, No Neutral
FORMA DE CONEXION		Screw Terminal (4-14AWG)
MONTAJE		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		0.83 lbs

Normas

Certificación		UL Listed
Normas ambientales		EU RoHS
UL STANDARD		UL1449 5th Edition (Pending)
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993

Código

55110036

