





CITEL

UL TYPE 4CA - I_{max} 18kA - I_n 3kA

MSB10-120(UL)

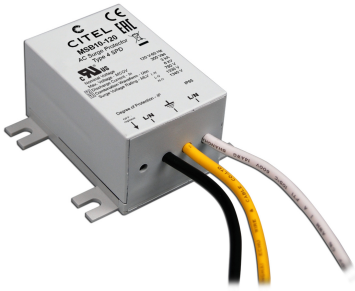

- ▶ MOV Technology
- ▶ I_{max} 18kA
- ▶ I_n 3kA
- ▶ LED Indicator
- ▶ IP67
- ▶ ANSI/IEEE C136.2 Extreme 20kV/10kA
- ▶ ANSI/IEEE C62.41 20kV/10kA
- ▶ UL Type 4CA
- ▶ 10-year warranty

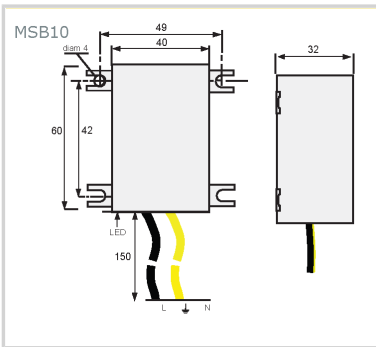

| Electrical Characteristics | | |
|--|------------------|---|
| Network | | 120/208 V |
| Nominal line voltage | Un | 120 Vac |
| Max. AC operating voltage | Uc | 150 Vac |
| Max. discharge current max. withstand @ 8/20 μs by pole | I _{max} | 10 kA |
| Protection mode(s) | | Common/Differential mode |
| Protection level L/N @ I _n (8/20μs) | Up L/N | 1 kV |
| POWER SPD TYPE | | UL1449 5th Ed. TYPE 4CA |
| VOLTS | (V) | 277 |
| AC/DC/DC PV/RF | | AC |
| PHASE | (PH) | 1 |
| AMPS | (A) | N/A |
| AMBIENT MIN | (C) | -35 |
| AMBIENT MAX | (C) | +85 |
| MODES | | L-L, L-G, L-N |
| MLV | (V) | 780/1340/1330/- |
| MCOV | (V) | 300/300/300 |
| IN 15 impulses 8/20μs | (kA) | 3 |
| SCCR | (kA) | n/a |
| IMAX 8/20μs | (kA) | 18 |
| Mechanical Characteristics | | |
| Technology | | MOV+GDT |
| Connection to Network | | Wires |
| Mounting | | Wall or plate |
| Operating temperature | Tu | -40/+85°C |
| Protection rating | | IP65 |
| Failsafe mode | | Disconnection from AC network |
| TECHNOLOGY | | Thermal-MOV |
| NETWORK CONFIGURATION | | 1PH, 2W+G, Single Phase (or 2PH, 2W+G, Two Phase) |
| CONNECTION METHOD | | 18" #14 AWG LEADS |
| MOUNTING | | FLANGE MOUNT |
| MATERIAL | | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | | NEMA 6P (IP67) |
| FAIL-SAFE BEHAVIOR | | Disconnection via fuse-link |
| REAL-TIME DIAGNOSTICS | | LED Indicator |
| DIMENSIONS | | See diagram |
| WEIGHT | | 0.30 lbs |
| SPARE PART | | n/a |
| Standards | | |
| Certification | | UL |
| Environmental standards | | EU RoHS |
| UL STANDARD | | UL1449 5th Edition |
| UL CATEGORY | | VZCA2, VZCA8 |
| UL FILE NUMBER | | E326289 |
| STANDARDS | | NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ANSI/IEEE C62.41 | | Category C 20kV/10kA |
| Part number | | |
| 561601 | | |

