




CITEL

UL TYPE 4CA - I_{max} 18kA - I_n 3kA

MSB10-400(UL)



- ▶ MOV Technology
- ▶ I_{max} 18kA
- ▶ I_n 3kA
- ▶ LED Indicator
- ▶ IP67
- ▶ ANSI/IEEE C136.2 Extreme 20kV/10kA
- ▶ ANSI/IEEE C62.41 20kV/10kA
- ▶ UL Type 4CA
- ▶ 10-year warranty

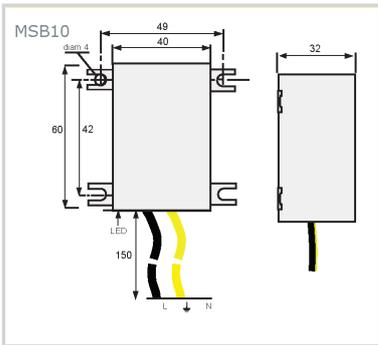

Electrical Characteristics		
Network		230 V single-phase
Nominal line voltage	U _n	230 V
Max. AC operating voltage	U _c	300 Vac
Max. discharge current max. withstand @ 8/20 μs by pole	I _{max}	10 kA
Protection mode(s)		Common/Differential mode
Protection level L/N @ I _n (8/20μs)	U _p L/N	1.2 kV
POWER SPD TYPE		UL1449 5th Ed. TYPE 4CA
VOLTS	(V)	277
AC/DC/DC PV/RF		AC
PHASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+85
MODES		L-L, L-G, L-N
MLV	(V)	780/1330/1340/-
MCOV	(V)	300/300/300
I _N 15 impulses 8/20μs	(kA)	3
SCCR	(kA)	n/a
I _{MAX} 8/20μs	(kA)	18
Mechanical Characteristics		
Connection to Network		Wires
Operating temperature	T _u	-40/+85°C
Protection rating		IP66
Failsafe mode		Disconnection from AC network
TECHNOLOGY		Thermal-MOV
NETWORK CONFIGURATION		1PH, 2W+G, Single Phase (or 2PH, 2W+G, Two Phase)
CONNECTION METHOD		18" #14 AWG LEADS
MOUNTING		FLANGE MOUNT
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 6P (IP67)
FAIL-SAFE BEHAVIOR		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		LED Indicator
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		n/a
Standards		
Certification		UL
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA2, VZCA8
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ANSI/IEEE C62.41		Category C 20kV/10kA
ANSI/IEEE C136.2		Extreme Category 20kV/10kA
ENVIRONMENTAL STANDARDS		ROHS
Part number		
561501		

