




- ↳ Hybrid SAD-GDT Technology
- ↳ UL497B LISTED
- ↳ 20kA I_{max} (1x-8/20us)
- ↳ 5kA I_{mp} (2x-10/350us)
- ↳ 5kA I_n (10x-8/20us)
- ↳ Modular
- ↳ 2W+SHIELD+G

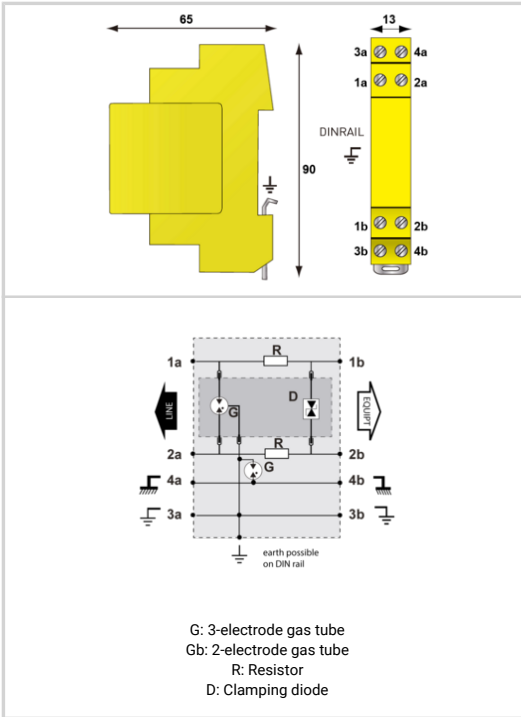

Electrical Characteristics		
Network		RTC, ADSL2, VDSL2
Max. DC operating voltage	U _c	170 Vdc
Max. frequency	f max.	> 10 MHz
Insertion loss		< 1 dB
Impulse current 2 x 10/350µs Test - D1 Category	I _{imp}	5 kA
Nominal discharge current C2 Category	I _n	5 kA
Max. Load current	I _L	300 mA
Line resistance (± 10%)		4.7 Ohm
DATA SPD TYPE		UL497B LISTED
VOLTS	(V)	150
WIRES		2W+Shield+G
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	210
MCOV	(V)	170
I _N 10 impulses 8/20µs	(kA)	5
I _{MAX} 8/20µs	(kA)	20
I _{imp} 10/350µs	(kA)	5
DATA SPEED	(Mbps)	10/100
FREQUENCY	(MHz)	up to 10
INSERTION LOSS (@ FREQ)	(db)	< 1
CAPACITANCE	(pF)	< 50

Mechanical Characteristics	
Technology	GDT+Clamping diode
Connection to Network	By screw terminal: cross section 0.5-2.5mm ²
Format	Plug-in DIN box
Failsafe mode	Short-circuit
TECHNOLOGY	SAD-GDT
NETWORK CONFIGURATION	1 Channel (2W+SHIELD+G)
CONNECTION METHOD	Screw terminal
MOUNTING	Din rail
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DIMENSIONS	See diagram
WEIGHT	0.30 lbs
SPARE PART	DLAM-170D3

Standards	
Certification	UL Listed
UL STANDARD	UL497B
UL CATEGORY	QVQG
UL FILE NUMBER	E184939
STANDARDS	IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS

Part number	
6406011	

