


M50-120S-A



- Hybrid MOV-GSG Technology
- UL1449 Type 1 LISTED
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator and audible alarm
- NEMA 6 (exceeds NEMA 4X or 4)
- Optional Type 2 LISTED with UL1283 Filter
- 10-Year warranty

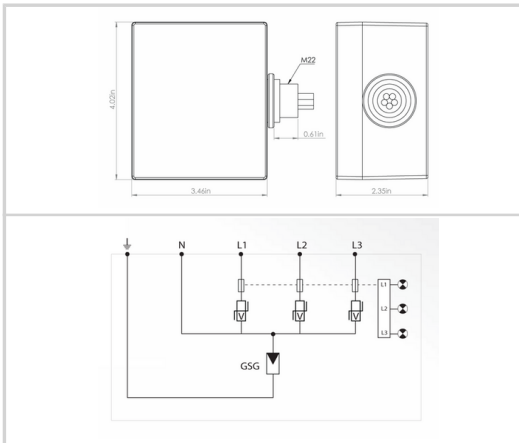

Electrical Characteristics		
Let through Voltage <i>U_{res}</i> at 20kA	V	1500.0000
POWER SPD TYPE		UL1449 TYPE 1 LISTED
VOLTS	(V)	120
AC/DC/DC PV/RF		AC
PHASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+80
MODES		L-L, L-G, L-N, N-G
VPR	(V)	700/1200/1200
MCOV	(V)	140/140/120
I _N 15 impulses 8/20μs	(kA)	20
SCCR	(kA)	150
I _{MAX} 8/20μs	(kA)	50
Installation		
Housing/Enclosure material		Aluminum cast
Mounting		Side mount
IP Environmental rating/IP		IP66
NEMA Environmental rating/NEMA		NEMA 6
Installation Location		Indoor / outdoor
Accessories		brackets
Mechanical Characteristics		
TECHNOLOGY		MOV-GSG
NETWORK CONFIGURATION		1PH, 2W+G, Single
CONNECTION METHOD		36" #12 AWG LEADS
MOUNTING		SIDE MOUNT, THREADED M22 (1/4" NPT ADAPTER)
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6 (IP66)
FAIL-SAFE BEHAVIOR		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		LED and audible alarm
DIMENSIONS		See diagram
WEIGHT		2.5 lbs.
Standards		
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Part number		
751103		