




# CITEL

## M50-347Y-B



- Hybrid MOV-GSG Technology
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator and audible alarm
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

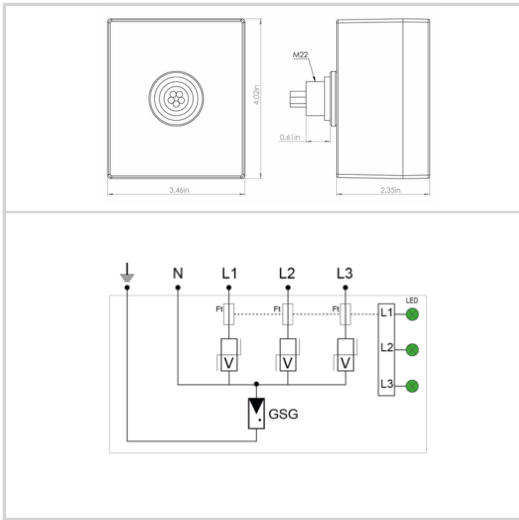

Características eléctricas		
POWER SPD TYPE		-
TENSION	(V)	347/600
AC/DC/DC PV/RF		AC
FASE	(PH)	3Y
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+80
MODOS		L-L, L-N, L-G, N-G
VPR	(V)	3000/1500/1800/1800
MCOV	(V)	690/400/400/350
IN	(kA)	20
Icc cortocircuito	(kA)	150
IMAX	(kA)	50
Características mecánicas		
TECNOLOGIA		MOV-GSG
CONFIGURACION DE RED		3PH, 4W+G, Wye
FORMA DE CONEXION		36" #12 AWG LEADS
MONTAJE		BACK MOUNT, THREADED M22 (1/4" NPT ADAPTER)
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6 (IP66)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		LED and audible alarm
DIMENSIONS		See diagram
WEIGHT		2.5 lbs.
Normas		
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Código		
751611		

