





UL121201 Hazardous Locations- I_{max} 40kA - In 20kA - Modular

CITEL

DS43S-230

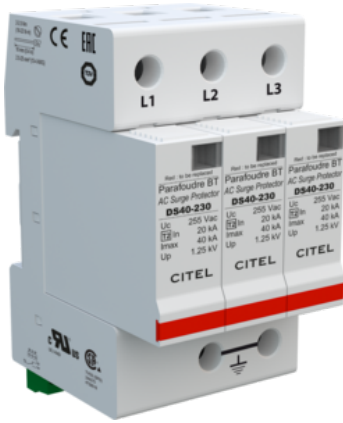

- ↳ MOV Technology
- ↳ UL1449 Type 4CA
- ↳ 40kA Surge Current Rating
- ↳ Visual fault indicator and remote contacts
- ↳ 10-Year warranty

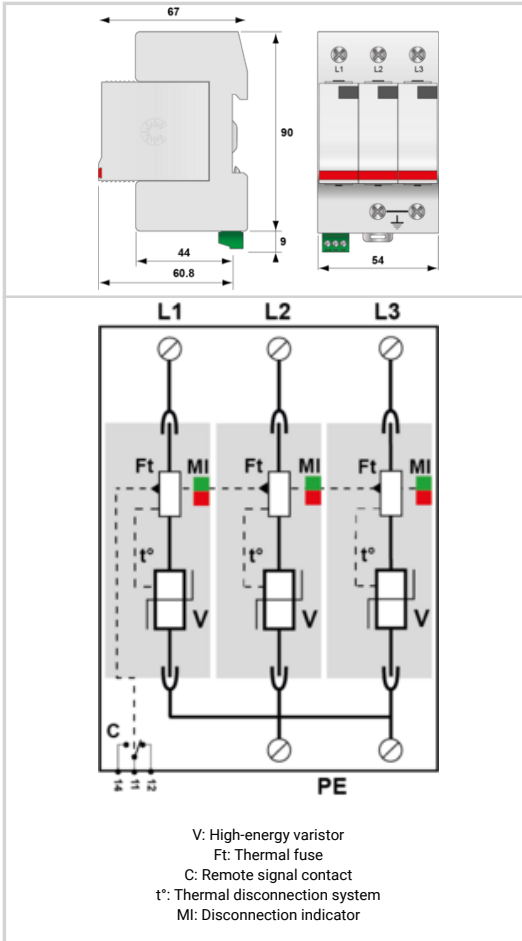

Electrical Characteristics	
Network	230/400 V 3-phase
Total Maximum discharge current <i>max. total withstand @ 8/20 μs</i>	I _{max} Total 160 kA
Protection mode(s)	Common mode
POWER SPD TYPE	UL1449 5th Ed. TYPE 4CA
VOLTS	(V) 400/230
AC/DC/DC PV/RF	AC
PHASE	(PH) 3Y
AMPS	(A) N/A
AMBIENT MIN	(C) -35
AMBIENT MAX	(C) +60
MODES	L-L, L-G
MLV	(V) 2730/-/1600/-
MCOV	(V) 480/-/275/-
IN	(kA) 20
15 impulses 8/20μs	
SCCR	(kA) n/a
IMAX	(kA) 40
8/20μs	
Iimp	(kA) 4
10/350μs	
Mechanical Characteristics	
Technology	MOV
Connection to Network	By screw terminals: 2.5-25mm ² / by bus
Format	Plug-in modular box
Failsafe mode	Disconnection from AC network
Weight	0.267 kg
TECHNOLOGY	MOV
NETWORK CONFIGURATION	3PH, 3W+G, Delta
CONNECTION METHOD	SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MOUNTING	Din Rail
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	0.90 lbs
SPARE PART	DSM40-230
Standards	
Certification	CSA / UL Listed
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA2, VZCA8
UL FILE NUMBER	E326289
STANDARDS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
Part number	
461523	

