


MSB10-400(UL)



- ↳ MOV Technology
- ↳ I_{max} 18kA
- ↳ I_n 3kA
- ↳ LED Indicator
- ↳ IP67
- ↳ ANSI/IEEE C136.2 Extreme 20kV/10kA
- ↳ ANSI/IEEE C62.41 20kV/10kA
- ↳ UL Type 4CA
- ↳ 10-year warranty

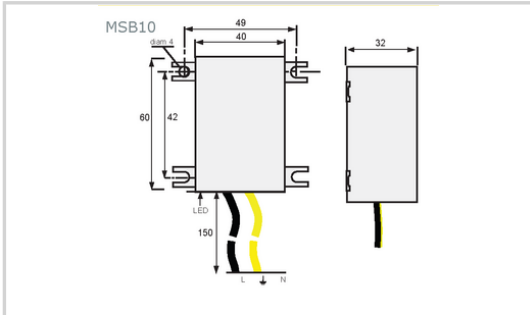

Características eléctricas		
Modo(s) de protección		Modo Común o Mode Diferenciado
POWER SPD TYPE		UL1449 5th Ed. TYPE 4CA
TENSION	(V)	277
AC/DC/DC PV/RF		AC
FASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+85
MODOS		L-L, L-G, L-N
MLV	(V)	780/1330/1340/-
MCOV	(V)	300/300/300
IN	(kA)	3
I _{cc} cortocircuito	(kA)	n/a
IMAX	(kA)	18
Características mecánicas		
Conexión a la red		Salida por hilos
Peso		0.116 kg
TECNOLOGIA		Thermal-MOV
CONFIGURACION DE RED		1PH, 2W+G, Single Phase (or 2PH, 2W+G, Two Phase)
FORMA DE CONEXION		18" #14 AWG LEADS
MONTAJE		FLANGE MOUNT
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 6P (IP67)
DESCONEXION SEGURA		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		LED Indicator
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		n/a
Normas		
Certificación		UL
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA2, VZCA8
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ANSI/IEEE C62.41		Category C 20kV/10kA
ANSI/IEEE C136.2		Extreme Category 20kV/10kA
ENVIRONMENTAL STANDARDS		ROHS
Código		
561501		

